



PRODUCT CATALOG

Power You Can Trust

CROWN



CONTENT

01 SINGLE PHASE INVERTER

OFF-GRID

HYBRID

02 THREE PHASE HYBRID INVERTER

LOW VOLTAGE

HIGH VOLTAGE

03 ON-GRID INVERTER

04 SOLAR PUMP CONTROLLER

05 ALL IN ONE ESS

06 RESIDENTIAL LiFePO4 BATTERY

TRANSPARENT

WALL MOUNT

MOBILE GROUND MOUNT


07 C&I ESS

HIGH VOLTAGE BATTERY RACK

Single Phase Off-Grid Inverter



**1.5KW
3KW**

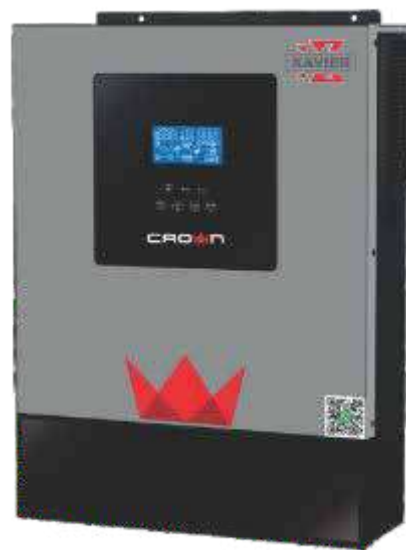

Easy installation, one
battery 12VDC (1.5KW)



Smart Battery
Equalization

BMS Built-in BMS for 3kW



Built-in Wi-fi (3KW)



Anti Dust Kit



VDC Range
30~400



Max Efficiency
93%

PF1

Output power factor 1



2.5" LCD with touch
pad



PV - 2500 | PV - 3000



**1.5KW
3KW**

MODEL NAME	XAVIER-1.5KW-PF1	XAVIER-3KW-PF1
RATED POWER	1500VA/1500W	3000VA/3000W
INPUT		
Voltage	230VAC	
Selectable voltage range	170 ~ 280VAC (for personal computers) 90 ~ 280VAC (for home appliances)	
Frequency range	50 Hz / 60 Hz (auto sensing)	
OUTPUT		
AC voltage regulation (batt. mode)	230VAC $\pm$ 5%	
Output power	1500W with PV & battery 1200W with battery only	3000W
Surge power	2400VA	6000VA
Efficiency (peak)	93%	
Transfer time	10ms (for personal computers)	
Waveform	Pure sine wave	
BATTERY		
Battery voltage	12VDC	24VDC
Floating charge voltage	13.5VDC	27VDC
Overcharge protection	16VDC	32VDC
Battery type	Lithium / Lead-acid	Lithium / Lead-acid
SOLAR CHARGER & AC CHARGER		
Solar charger type	MPPT	MPPT
Max. PV array open circuit voltage	400VDC	450VDC
Max. PV array power	2500W	3000W
MPPT range @ operating voltage	30 ~ 400VDC (30V ~ 60V with battery)	60 ~ 400VDC
Max. solar charge current	80A	100A
Max. AC charge current	80A	80A
Max. charge current	80A	100A
GENERAL SPECIFICATION		
Dimension, D*W*H (mm)	90*288*357	100*288*390
Net weight (Kgs)	6.6	7.5
Communication interface	RS232	
OPERATING ENVIRONMENT		
Humidity	5% to 95% relative humidity (non-condensing)	
Operating temperature	-10°C to 50°C	
Storage temperature	-15°C to 60°C	

Single Phase Off-Grid Inverter



Max. PV input voltage 500V



Wide voltage compatibility: Supports 12V, 24V, and 48V battery systems



Battery activation via PV and utility grid



Dual outputs for intelligent load management



Real-time 24/7 remote monitoring



Flexible operation modes to meet diverse energy needs



EQ function for enhanced battery performance and longevity



XAVIER 2.5KW



PV - 3000

Model		XAVIER 2.5K/12V
Input (PV DC)		
Max. PV array power (W)		3000
Number of independent MPPT inputs		1
Max. PV input voltage (V)		500
MPPT voltage range (V)		30 ~ 440
Start-up voltage (V)		65
Max. PV input current per MPPT (A)		18
Max. Short-circuit current per MPPT (A)		20
Battery		
Compatible battery type		Lithium-ion / Lead-acid
Rated battery voltage (V)		12
Max. AC charge current (A)		100
Max. PV+AC charge current (A)		120
Max. discharging current (A)		140
Force wake up battery from PV function		Yes
Force wake up battery from Grid function		Yes
Grid		
Rated AC voltage (V)		230
AC voltage range (V)		170-280VAC (For Personal Computer); 90-280VAC (For Home Appliances)
Rated AC frequency (Hz)		50 / 60
Max. AC input power (W)		5000
PF		0.99
THDI		< 3%
UPS		
Rated output power (W)		1500 (BAT) / 2500 (PV+BAT)
Rated output voltage (V)		220 / 230VAC + 5%
Rated output current (A)		6.5 / 10.9
Rated output frequency (Hz)		50 / 60
Output port		Single outputs
Surge power, duration		2 × rated power for 2s
Switching time (UPS)		<10ms@Single
Wave form		Sine wave
THDV		3%
Overload protection		5s@≥150% load; 10s@110%~150% load
Efficiency		
MPPT efficiency		99.0%
Max. charge efficiency		96.0%
Max. discharge efficiency		89.0%
Protection		
Over current / voltage protection		Yes
AC short-circuit current protection		Yes
DC surge protection		Type III
AC surge protection		Type III
General		
Dimensions (W × H × D)		304.4×320×101 mm 12.0×12.6×4.0 in
Weight		5.4 kg / 12 lbs
Ingress protection rating		IP21
Relative humidity		5% ~ 95%
Operating environment temperature range (°C)		-10 ~ 45 (> 40 °C Derating)
Storage temperature range (°C)		-15 ~ 60
Display & Communication interface		LCD + LED; WIFI
Warranty		1.5 years
Cooling method		Smart Cooling
Max. operating altitude (m)		2000

Single Phase Hybrid Inverter



**4KW
6KW**



Feed-in to the Grid



Works Without Battery

BMS

Battery Management System



Built-in Wi-fi



Dual Output



VDC Range
60-450



Max Efficiency
93%



Built-in 120A Mppt
solar charger



5.2" LCD with touch
pad

PV - 6000 | PV - 9000



4

**YEARS
WARRANTY**

Terms & Conditions Apply

**4KW
6KW**

MODEL NAME	XAVIER-III-4KW	XAVIER-III-6KW
RATED POWER	4000VA/4000W	6000VA/6000W
INPUT		
Voltage	230VAC	
Selectable voltage range	170 ~ 280VAC (for personal computers) 90 ~ 280VAC (for home appliances)	
Frequency range	50 Hz / 60 Hz (auto sensing)	
OUTPUT		
AC voltage regulation (batt. mode)	230VAC ± 5%	
Surge power	7200VA	12000VA
Efficiency (peak)	93%	
Transfer time	10ms (for personal computers), 20ms (for home appliances)	
Waveform	Pure sine wave	
Dual outputs	Yes	
BATTERY		
Battery voltage	24VDC	48VDC
Floating charge voltage	27VDC	54VDC
Overcharge protection	33VDC	63VDC
SOLAR CHARGER & AC CHARGER		
Solar charger type	MPPT	
Max. PV array open circuit voltage	500VDC	
Max. PV array power	6000W	9000W
Max. PV input current	40A	
MPPT range @ operating voltage	60 ~ 450VDC	
Max. solar charge current	120A	
Max. AC charge current	100A	
Max. charge current	120A	
GENERAL SPECIFICATION		
Dimension, D*W*H (mm)	107*322.6*420.3	
Net weight (Kgs)	9.5	10.5
Communication interface	Wi-fi / RS-485 / CAN	
OPERATING ENVIRONMENT		
Humidity	5% to 95% relative humidity (non-condensing)	
Operating temperature	-10°C to 50°C	
Storage temperature	-15°C to 60°C	

Single Phase Hybrid Inverter

ARCEUS 3.6KW
6.5KW



Feed-in to the Grid



Works Without Battery

BMS

Battery Management System



Built-in Wi-Fi (6.5KW)
Optional Wi-Fi (3.6KW)



Dual Output



VDC Range
90-550 (6.5KW)



Parallel Operation up
to 9 Units (6.5KW)



Built-in 120A MPPT
solar charger (6.5KW)



5.2" LCD with touch
pad

PV - 5000 | PV - 7800



MODEL NAME	ARCEUS-3.6KW	ARCEUS-6.5KW
RATED POWER	3600VA/3600W	6500VA/6500W
AC INPUT		
Rated input voltage (VAC)	208 / 220 / 230 / 240; L + N + PE	
Voltage range (VAC)	90 ~ 280VAC ±3V(App. mode),170 ~ 264VAC ±3V(UPS mode)	
Frequency (Hz)	50 / 60 (auto adaptive)	
AC OUTPUT		
Rated capacity (KW)	3.6	6.5
Peak power (KVA)	3.6	6.5
Rated voltage (VAC)	208/220/230/240VAC ±5%	
Power factor (PF)	1.0	
Frequency	50/60 Hz 10.1%	
Switch time (ms)	10 (App. mode) / 10 (UPS mode)	
Wave form	Pure sine wave	
Overload capacity (batt. mode)	10min @102% ~ 110% load,	1min @102% ~ 110% load,
	10S @ 110% ~ 130% load	10s @ 110% ~ 130% load,
	3S @ 130% ~ 150% load,	3s @ 130% ~ 150% load,
	200ms @ > 150% load	200ms@> 150% load
Max. efficiency (peak)	93.5% @ 24VDC	94.0%
Parallel quantity	N/A	4 units
CHARGER (PV / AC)		
Solar charger type	MPPT	
Max. PV input current / input power	18A / 5000W	27A /7800W
MPPT range@operating voltage (VDC)	40 ~ 450VDC	90 ~ 550VDC
Max. PV open circuit voltage (VDC)	500VDC	550VDC
Max. PV charge current (A)	100A	120A
Max. AC charge current (A)	100A	100A
Max. charge current (PV + AC) (A)	100A	100A
BATTERY		
Normal voltage (VDC)	24	48
Floating charge voltage (VDC)	27.6	54.0
Overcharge protection (VDC)	30	60
Battery type	Lithium / Lead-acid	Lithium / Lead-acid
INTERFACE		
HMI	5.2” LCD, display running mode/loads/input/output etc	
Interface	RS485 / CAN / USB / RS232 / dry contact	
Monitoring	Wi-fi (3.6 optional) / 6.5 (built-in)	
GENERAL SPECIFICATION		
Ingress protection	IP20	
Operating temperature	0°C to 40°C	
Relative humidity	20% to 95% (non-condensing)	
Storage temperature	-15°C to 60°C	
Net weight (Kg)	7.8	9.2
Dimensions, W*H*D (mm)	312*430*120	375*570*200
Max. operating altitude	4000m (derating above 1000m)	

Single Phase Hybrid Inverter

ELEGO STAR 6.5KW



Feed-in to the Grid



Separate Generator Port Available

BMS

Built-in BMS



Built-in Wi-Fi



Dual Output



Touch Screen



Dual MPPT PV Input



Built-in 120A Mppt solar charger



Parallel Operation up to 16 Units



PV - 9600



MODEL NAME	ELEGO-STAR-6.5KW
RATED POWER	6500VA/6500W
PV INPUT (DC)	
Max. PV array power (W)	9600
Rated PV input voltage (V)	320
Number of independent MPPT inputs	2
PV input voltage range (V)	100 ~ 500
MPPT voltage range (V)	120 ~ 400
Start-up voltage (V)	100
Max. PV input current per MPPT (A)	17 / 17
Max. PV short-circuit current input per MPPT (A)	25 / 25
BATTERY	
Compatible battery type	Lithium-ion / Lead-Acid
Rated battery voltage (V)	48
Battery voltage range (V)	38.4 ~ 60
Max. charge / discharge current (A)	140 / 140
Max. charge / discharge power (W)	6000/6500
Recommend capacity of battery per inverter	>200AH
Force wake up battery from PV function	Yes
Force wake up battery from Grid function	Yes
GRID	
Rated AC voltage (V)	230
Rated AC frequency (Hz)	50 / 60
Rated AC output current (A)	28.3
Rated AC output power (W)	6500
Max. AC input power (W)	9000
Power factor	0.99
THDI	<5%
Max. continuous AC passthrough current (A)	40
UPS	
Rated output power (W)	6500
Rated output voltage (V)	230
Rated output current (A)	28.3
Rated output frequency (Hz)	50 / 60
Surge power, duration	2Pn, <2s
Switching time (Ups)	<15ms @ single / <30ms @ parallel
Wave form	sine wave
THDV	3%
EFFICIENCY	
MPPT efficiency	99.9%
Max. efficiency	93.0%
Max. charge efficiency	93.0%
Max. discharge efficiency	93.0%
PROTECTION	
Over current / voltage protection	YES
AC short - circuit current protection	YES
Grid monitoring	YES
DC surge protection type III	YES
AC surge protection type III	YES
Battery reverse polarity protection	YES
GENERAL	
Dimensions, W*H*D (mm)	330*505*135
Weight (Kgs)	14.5
Ingress protection rating	IP21
Operating environment temperature range (°C)	0 ~5 0
Storage temperature range (°C)	-15 ~ 60
Relative humidity	5% ~ 95%
Display communication interface	Touch screen, RS485 / Wifi / CAN
Cooling method	Smart cooling
Topology on AC side	Transformer-less
Altitude (M)	<2000m
Noise emission (typical)	<50dB

Single Phase Hybrid Inverter



Feed-in to the Grid



Built-in Wi-Fi



Dual MPPT Input



Separate Generator Port Available



Dual Output



Built-in 150A MPPT solar charger

BMS

Built-in BMS



LCD with Touch Pad



Parallel Operation up to 6 Units



NOVA

8.6KW
9.8KW

PV - 14000



MODEL NAME	NOVA-8.6KW	NOVA-9.8KW
RATED POWER	8600VA/8600W	9800VA/9800W
Parallel Capability	Yes, 6 units	
INPUT		
Voltage	230VAC	
Selectable voltage range	170 ~ 280VAC (for computers) 90 ~ 280VAC (for home appliances)	
Frequency range	50 Hz / 60 Hz (auto sensing)	
OUTPUT		
AC voltage regulation (batt. mode)	230VAC ± 5%	
Surge power	16000VA	22000VA
Efficiency (peak)	93%	
Transfer time	10 ms (for personal computers) 20 ms (for home appliances)	
Waveform	Pure sine wave	
BATTERY		
Battery voltage	48VDC	
Floating charge voltage	54VDC	
Overcharge protection	63VDC	
SOLAR CHARGER & AC CHARGER		
Max. PV array power	14000W (7000W*2)	
MPPT range @ operating voltage	90 ~ 450VDC	
Max. PV array open circuit voltage	500VDC	
Max. PV input current	27A * 2 (MAX 40A)	
Max. solar charge current	150A	
Max. AC charge current	150A	
Max. charge current	150A	
GENERAL SPECIFICATION		
Dimension, D*W*H (mm)	158.4*503.6*530.8	147.4*432.5*553.6
Net weight (Kgs)	19.7	20
Communication interface	USB/RS232/RS485/Wi-fi/Dry-contact	
OPERATING ENVIRONMENT		
Humidity	5% to 95% relative humidity(non-condensing)	
Operating temperature	-10°C to 50°C	
Storage temperature	-15°C to 60°C	

Single Phase Hybrid Inverter



Feed-in to the Grid



Up to 15kW Gen/AC
coupling input



2 MPPT with 4 strings,
Max. 24kW PV input



Separate Generator
Port Available



Dual AC Output Port



Max. charging and discharging
current: 250A



Integrated Design with Load
and Battery Breaker



Touch Screen



Parallel Operations up
to 16 Units



NOVA 12.6KW



PLUG & PLAY

**6
YEARS
WARRANTY**

Terms & Conditions Apply

PV - 24000

NOVA 12.6KW

MODEL NAME	NOVA-12.6KW
Rated Power	12600VA/12600W
INPUT (PV DC)	
Max. PV array power (W)	24000 (12000/12000)
Rated PV input voltage (V)	320
Number of independent MPPT inputs	2/(2:2)
PV input voltage range (V)	100-480
MPPT voltage range (V)	120-440
Start-up voltage (V)	100
Max. PV input current per MPPT (A)	35/35
Max. PV short-circuit current input per MPPT (A)	44/44
Battery	
Compatible battery type	Lithium-ion/Lead-Acid
Rated battery voltage (V)	48/51.2
Battery voltage range (V)	46.4-60/38.4-60
Max. charging / discharging current (A)	250
Max. charging / discharging power (W)	12600
Force wake up battery from PV and Grid function	YES
Grid	
Rated AC voltage (V)	230
Acceptable Input Voltage Range (V)	90~280
Rated AC frequency (Hz)	60/50
Rated AC input current (A)	100
Rated AC input power (W)	24000
PF	0.99
THDI	<5%
Max. continuous AC passthrough current(A)	100
UPS	
Rated output power (W)	12600
Rated output voltage (V)	230
Rated output current (A)	50
Rated output frequency (Hz)	50/60
Surge power, duration	2Pn, 5s
Switching time (UPS)	<7ms@Single; <10ms@Parallel
Wave form	Sine wave
THDV	3%
GEN	
Acceptable input voltage range	230
Max. AC input voltage (V)	280
Max. AC input current (A)	63
Rated input frequency	50Hz/60Hz (Auto detection)
Transfer time	<10ms@Single; <20ms@Parallel
THDV	<3%
Overload protection	5s@?150% load /10s@110%~150% load
Efficiency	
Max. efficiency	93.50%
Max. charging / discharging efficiency	93.00%
Max. MPPT efficiency	99.00%
Protection	
PV reverse polarity protection(Y/N)	YES
Over current / voltage protection(Y/N)	YES
AC Short-circuit current protection(Y/N)	YES
Grid monitoring(Y/N)	YES
DC switch(Y/N)	YES
DC / AC Surge protection Type III	Type III
Battery reverse polarity protection(Y/N)	YES
General	
Dimensions, D*W*H (mm)	150*530*830
Weight (Kgs)	40

Single Phase Hybrid Inverter



Feed-in to the Grid



Peak Shaving / AC Coupling Function



2 MPPT, Max. PV Input
6.5KW: 9.6KW
10KW: 15KW



Separate Generator Port Available
Intelligent Generator Control



IP66 Protection



Max. Charging & Discharging
Current: 210A

BMS

Built-in BMS



Smart Scheduling For Charge &
Discharge Cycles



Parallel Operation
up to:
6.5KW: 6 Units
10KW: 10 Units



ELEGO OYSTER 
**6.5KW
10KW**



PV - 9600 | PV - 15000



MODEL NAME	ELEGO-OYSTER-6.5KW	ELEGO-OYSTER-10KW
RATED POWER	6500VA/6500W	10000VA/10000W
PV INPUT (DC)		
Max. PV array power (W)	9600	15000
Rated PV input voltage (V)	360	360
Number of independent MPPT inputs	2	2
PV input voltage range (V)	100 ~ 530	100 ~ 600
MPPT voltage range (V)	150 ~ 425	120 ~ 500
Start-up voltage (V)	140	140
Max. PV input current per MPPT (A)	18	25
Max. PV short-circuit current input per MPPT (A)	32	34
BATTERY		
Compatible battery type	Lithium / Lead-Acid	Lithium / Lead-Acid
Rated battery voltage (V)	48	48
Battery voltage range (V)	40 ~ 60	40 ~ 60
Max. charge/discharge current (A)	125/145	208
Max. charge/discharge power (W)	6500	10000
Force wake up battery from PV function	Yes	Yes
GRID		
Rated AC voltage (V)	230	230
Rated AC frequency (Hz)	50/60	50/60
Rated AC output current (A)	28.2	44
Rated AC output power (W)	6500	10000
Max. AC input power (W)	12000	15000
Power factor	0.99	
THDI	<3%	<3%
Max. continuous AC passthrough current (A)	52.2	90
UPS		
Rated output power (W)	6500	10000
Rated output voltage (V)	230	230
Rated output current (A)	28.2	44
Rated output frequency (Hz)	50/60	50/60
Surge power, duration	2Pn, 0.5s	2Pn, 0.5s
Switching time (UPS)	< 20ms	< 20ms
Waveform	Sine wave	Sine wave
THDV	< 5%	< 3%
EFFICIENCY		
MPPT efficiency	99.9%	99.9%
Max. efficiency	97.3%	97.5%
Max. charge efficiency	94.5%	94.0%
Max. discharge efficiency	94.5%	94.0%
PROTECTION		
Over current / voltage protection	Yes	Yes
Anti-islanding protection	Yes	Yes
AC short-circuit current protection	Yes	Yes
Leakage current protection	Yes	Yes
Ground fault monitoring	Yes	Yes
Grid monitoring	Yes	Yes
DC switch	Yes	Yes
DC surge protection type III	Yes	Yes
AC surge protection type III	Yes	Yes
GENERAL SPECIFICATION		
Dimensions, W*H*D (mm)	487*455*211.7	536*556*290
Weight (Kgs)	29	42.64
Ingress protection rating	IP66	IP66/NEMA 4X
Operating environment temperature range (°C)	-25 ~ 60	0 ~ 100%
Storage temperature range (°C)	-40 ~ 65	-25 ~ 60
Relative humidity	0 ~ 95%	-25 ~ 60
Display communication interface	LCD+RGB, RS485/wi-fi/CAN	Touch color screen, RS485/wi-fi/CAN
Cooling method	Smart cooling	
Topology on AC side	Transformer-less	
Altitude (M)	<2000m	
Noise emission (typical)	<25dB	<50dB

Single Phase Hybrid Inverter



2 MPPTs with Max. PV input of 12kW



Ip65 protection rating: Ensures reliable dust and water resistance



Parallel operation: Supports up to 16 units for scalable energy solutions



Max. charge/discharge current: 140A



Seamless off-grid switching: Automatic transition for uninterrupted power



Dedicated port: Supports generator or smart load management for enhanced system stability



Smart monitoring: Remote configuration and real-time performance tracking



6.5KW



PV-12000



Model	ECO-OYSTER-6.5KW
Input (PV DC)	
Max. PV input power (W)	12000 (6000 / 6000)
Number of independent MPPT inputs	2
Max. PV input voltage (V)	500
MPPT voltage range (V)	80 ~ 400
Start-up voltage (V)	100
Max. PV input current per MPPT (A)	40 (20 / 20)
Max. PV short-circuit current input per MPPT (A)	50 (25 / 25)
Battery	
Compatible battery type	Lithium-ion / Lead-Acid
Rated battery voltage (V)	48
Battery voltage range (V)	135 / 140
Max. charging/discharging current (A)	110
Max. charging/discharging power (W)	6500
Force wake up battery from PV function	YES
Force wake up battery from Grid function	YES
Force wake up battery from GEN function	YES
Grid	
Rated AC voltage (V)	230
Rated AC frequency (Hz)	50 / 60
Rated AC output current (A)	28.2
Rated AC output power (W)	6500
Max. AC input power (W)	9000
PF	0.99
THDI	< 5%
Max. continuous AC passthrough current (A)	60
GEN	
Rated GEN voltage (V)	230
Rated GEN frequency (Hz)	50 / 60
Rated GEN input current (A)	32
Rated GEN input power (W)	7370
UPS	
Rated output power (W)	6500
Rated output voltage (V)	230
Rated output current (A)	28.2
Rated output frequency (Hz)	50 / 60
Surge power, duration	13000W, 5s
Switching time	< 10ms @ Single; < 20ms @ Parallel
Wave form	Sine wave
Load Capacity of Motor	5HP
OverLoad Capacity	10s@110% ~ 150 % load; 5s@150% ~ 200% load
THDV	3%
Efficiency	
MPPT efficiency	99.0%
Max. efficiency	94.0%
Max. charge efficiency	94.0 %
Max. discharge efficiency	93.0%
Protection	
PV reverse polarity protection	YES
Over current/voltage protection	YES
Anti-islanding protection	YES
AC Short-circuit current protection	YES
Grid monitoring	YES
Ground fault monitoring	YES
AC/DC surge protection	YES
Leakage current protection	Optional
DC switch	Optional
Rapid shut down	Optional
AFCI protection	Optional
General	
Dimensions (W × H × D)	434 × 384 × 187 mm / 17.09 × 15.12 × 7.36 in
Weight	16.95 kg / 37.38 lbs
Ingress protection rating	IP65
Operating environment temperature range (°C)	-25 ~ 60, >45°C derating
Storage temperature range (°C)	-15 ~ 60
Relative humidity	5% ~ 95%
Display & Communication interface	LCD + LED, RS485 / Wi-Fi / CAN
Warranty	5 years
Cooling method	Smart Cooling
Topology on AC side	Transformerless
Topology on Battery side	Transformer
Max. Operating Altitude (m)	4000, >2000 Power derating
Noise emission (dB)	40

Single Phase Hybrid Inverter



Next-generation internal structure optimization for easier handling and installation.



Output power from 8kW to 12kW, meeting the needs of medium to large residential energy storage systems.



Supports up to 20kW PV input with 3 independent MPPTs for enhanced energy generation efficiency.



Up to 270A charge/discharge current to maximize battery potential.



IP66 protection rating for reliable performance in outdoor environments.



Built-in Type II AC/DC surge protection for enhanced system safety.



8KW
10KW
12KW



PV-16000 | PV-20000



Model	ELEGO OYSTER-8KW		ELEGO OYSTER-10KW	ELEGO OYSTER-12KW
Input (PV DC)				
Max. PV input power (W)	16000		20000	
Rated PV input voltage (V)			360	
Number of independent MPPT inputs			3 / (1:1:1)	
Max. PV input voltage (V)			530	
MPPT voltage range (V)			150 ~ 425	
Start-up voltage (V)			140	
Max. PV input current per MPPT (A)			20	
Max. PV short-circuit current input per MPPT (A)			32	
Battery				
Compatible battery type	Lithium-ion / Lead-Acid			
Rated battery voltage (V)			48	
Battery voltage range (V)			48 ~ 60	
Max. charge / discharge current (A)	180		230	270
Max. charge / discharge power (W)	8000		10000	12000
Force wake up battery from PV and GEN function	YES			
Grid				
Rated AC voltage (V)			230	
Rated AC frequency (Hz)			50 / 60	
Rated AC output current (A)	34.7		43.5	52
Rated AC output power (W)	8000		10000	12000
Max. AC input current (A)	100			
Max. AC input power (W)	23000			
PF	0.99 (Adjustable from 0.8 leading to 0.8 lagging)			
THDI	< 3%			
Max continuous AC passthrough current (A)	100			
GEN				
Rated GEN voltage (V)			230	
Rated GEN frequency (Hz)			50 / 60	
Rated GEN input current (A)			80	
Rated GEN input power (W)			18400	
UPS				
Rated output power (W)	8000		10000	12000
Rated output voltage (V)			230	
Rated output current (A)	34.7		43.5	52
Rated output frequency (Hz)			50 / 60	
Surge power, duration	2 × rated power for 10s			
Switching time	7ms			
Wave form	Sine wave			
THDV	< 3%			
Efficiency				
MPPT efficiency			99.9%	
Max. charge / discharge efficiency			95.0%	
Protection				
Over current / voltage protection			YES	
Anti-islanding protection			YES	
AC short-circuit current protection			YES	
Leakage current protection			YES	
AFCI			Optional	
Ground fault monitoring			YES	
Grid monitoring			YES	
DC switch			YES	
AC / DC surge protection			Type II	
General				
Dimensions (W × H × D)	417 × 615.5 × 229.5 mm / 16.42 × 24.23 × 9.04 in			
Weight	TBD			
Ingress protection rating	IP66			
Relative humidity	0 ~ 100%			
Operating environment temperature range (°C)	-25 ~ 60 °C , > 45 °C Derating			
Storage temperature range (°C)	-40 ~ 65			
Display & Communication interface	LCD, RS485, Wifi, CAN			
Warranty	5 years			
Cooling method	Smart cooling			
Topology on AC / battery side	Transformer			
Max. operating altitude (m)	2000, > 2000 Derating			
Noise emission (dB)	50			

Three Phase Hybrid Inverter



Supports Independent Grid Export Control for Each Phase



Unbalanced Load Support



3 MPPT with 6 Strings



Dual Output for Smart Load Management



IP66 Protection



Dedicated GEN Port for Auto GEN Control, Smart Load, AC Coupling



User-friendly Touch Color Screen



Parallel Operation Up to 10 Units



5-20KW
(ThreePhase) 5-20KW



**5
YEARS
WARRANTY**

Terms & Conditions Apply



MODEL NAME	EOI-OYS- 5KW-3P	EOI-OYS- 6KW-3P	EOI-OYS- 8KW-3P	EOI-OYS- 10KW-3P	EOI-OYS- 12KW-3P	EOI-OYS- 15KW-3P	EOI-OYS- 20KW-3P
Input (PV DC)							
Max. PV input power (W)	7500	9000	12000	15000	18000	22500	30000
Rated PV input voltage (V)				690			
Number of independent MPPT inputs				3/(1:1:1)			
Max. PV input voltage (V)				1000			
MPPT voltage range (V)				200~900			
Start-up voltage (V)				100			
Max. PV input current per MPPT (A)				20/20/20			
Max. PV short-circuit current input per MPPT				25/25/25			
Battery							
Compatible battery type				Lithium-ion/Lead-Acid			
Battery voltage range (V)				40-60			
Max. charging/discharging current (A)	125	150	200	220	250	250	250
Max. charging/discharging power (W)	5000	6000	8000	10000	12000	12000	12000
Charging Strategy for Li-ion Battery				Self-adaption to BMS			
Input AC (Grid)							
Input voltage (3Φ)				3L/N/PE, 230/400Vac			
Rated AC frequency (Hz)				50/60			
Max. AC input power (W)	6250	7500	10000	12500	15000	18750	25000
Max. AC input current (A)	9	10.9	14.5	18.1	21.8	27.1	36.25
Output AC (Grid)							
Rated AC voltage (V)				3L/N/PE, 230/400Vac			
Rated AC frequency (Hz)				50/60			
Rated AC output power (W)	5000	6000	8000	10000	12000	15000	20000
Rated AC output current (A)	7.20	8.70	11.60	14.50	17.40	21.70	29.00
PF	0.99(Adjustable from 0.8 leading to 0.8 lagging)						
THDI				< 3%			
Max. continuous AC passthrough current (A)	30			50			70
GEN							
Rated GEN voltage (V)				3L/N/PE, 230/400Vac			
Rated GEN frequency (Hz)				50/60			
Rated GEN input current (A)				30			
Rated GEN input power (W)				20700			
UPS							
Rated output power (W)	5000	6000	8000	10000	12000	15000(PV+Battery)	20000(PV+Battery)
Rated output voltage (V)				3L/N/PE, 230/400Vac			
Rated output current (A)	7.20	8.70	11.60	14.50	17.40	21.70	29.00
Rated output frequency (Hz)				50/60			
Surge power, duration				1.5Pn, 5min			
Switching time				≤10ms			
Wave form				Sine wave			
THDV				<3%			
Efficiency							
Max. efficiency				97.70%			
Max. charge/discharge efficiency				94.0%			
Protection							
PV reverse polarity protection				YES			
Over current/voltage protection				YES			
Anti-islanding protection				YES			
AC Short-circuit protection				YES			
Leakage current protecion				YES			
Grid monitoring				YES			
DC switch				YES			
Ingress protection				YES			
DC Surge protection				YES			
AC Surge protection				YES			
General							
Dimensions(W*H*D)				480*703*258mm / 18.9*27.7*10.2 in			
Weight				53kg / 116.8lbs			
Ingress protection rating				IP66			
Operating environment temperature range(°C)				-25~+60, >45 °C derating			
Storage temperature range(°C)				-25~+60			
Relative humidity				0~100			
Display & Communication interface				Touch color screen, RS485/Wifi/CAN			
Warranty				5/10 years			
Cooling method				Smart cooling			
Topology				Transformer-less			
Altitude(m)				<2000			
Noise emission(typical)				<50dB			

High Voltage Hybrid Inverter



Supports Independent Grid Export Control for Each Phase



150% Unbalanced Load Support



Max. 3 MPPT & Max. PV input 45kW



Dual Output for Smart Load Management



IP66 Protection



Dedicated GEN Port for Auto GEN Control, Smart Load, AC Coupling



User-friendly Touch Color Screen



Parallel Operation Up to 10 Units



6-30KW (High Voltage)





MODEL NAME	EOI-OYS- 6KW-3PHV	EOI-OYS- 8KW-3PHV	EOI-OYS- 10KW-3PHV	EOI-OYS- 12KW-3PHV	EOI-OYS- 15KW-3PHV	EOI-OYS- 20KW-3PHV	EOI-OYS- 25KW-3PHV	EOI-OYS- 30KW-3PHV
Input (PV DC)								
Max. PV input power (W)	9000	12000	15000	18000	22500	30000	37500	45000
Rated PV input voltage (V)					690			
Number of independent MPPT inputs	2/(1:1)		3/(2:2:2)					
Max. PV input voltage (V)					1000			
MPPT voltage range (V)					200~900			
Start-up voltage (V)					100			
Max. PV input current per MPPT (A)	20/20		40/40/40					
Max. PV short-circuit current input per MPPT	25/25 (A:1/B:1)		50/50/50 (A:2/B:2/C:2)					
Battery								
Compatible battery type					Lithium-ion/Lead-Acid			
Rated battery voltage (V)					400			
Battery voltage range (V)					100~800			
Max. charging voltage (V)					800			
Max. charging/discharging current (A)	50		75					
Max. charging/discharging power (W)	6000	8000	10000	12000	15000	20000	25000	30000
Force wake up battery from PV function					YES			
Grid								
Rated AC voltage (V)					3L/N/PE, 230/400Vac			
Rated AC frequency (Hz)					50/60			
Rated AC output current (A)	8.7	11.6	14.5	17.4	21.7	29	36.2	43.5
Rated AC output power (W)	6000	8000	10000	12000	15000	20000	25000	30000
Max. AC input current (A)	11.3	17.4	21.8	26.1	32.6	43.5	54.3	65.3
PF	0.99 (Adjustable from 0.8 leading to 0.8 lagging)							
THDI					<3%			
Max. continuous AC passthrough current (A)					75			
GEN								
Rated GEN voltage (V)					3L/N/PE, 230/400Vac			
Rated GEN frequency (Hz)					50/60			
Rated GEN input current (A)					30			
Rated GEN input power (W)					20700			
UPS								
Rated output power (W)	6000	8000	10000	12000	15000	20000	25000	30000
Rated output voltage (V)					3L/N/PE, 230/400Vac			
Rated output current (A)	8.7	11.6	14.5	17.4	21.7	29	36.2	43.5
Rated output frequency (Hz)					50/60			
Surge power, duration					1.5Pn, 5min			
Switching time					≤10ms			
Wave form					Sine wave			
THDV					<3%			
Efficiency								
Max. efficiency					97.4%			
Max. charge/discharge efficiency					97.2%			
Protection								
PV reverse polarity protection					YES			
Over current/voltage protection					YES			
Anti-islanding protection					YES			
AC Short-circuit protection					YES			
Leakage current protection					YES			
Grid monitoring					YES			
DC switch					YES			
Ingress protection					YES			
DC Surge protection					Type III			
AC Surge protection					Type III			
General								
Dimensions (W*H*D)	480*703*258mm / 18.9*27.7*10.2 in							
Weight	TBD			50kg / 110.2lbs				
Ingress protection rating					IP66			
Operating environment temperature range (°C)					-25~60			
Storage temperature range (°C)					-40~70			
Relative humidity					0~100%			
Display & Communication interface	Touch color screen, RS485/Wifi/CAN							
Warranty	5/10 years							
Cooling method	Natural cooling			Smart cooling				
Topology					Transformer-less			
Altitude					<2000			
Noise emission (typical)					<50dB			

Single Phase On-Grid Inverter



1KW-3KW



On-Grid Single Phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 600V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II & III DC / AC
SPD



High Efficiency: up to
97.6%



Wi-Fi / 4G Plug
Optional



LCD With Touch Pad



MODEL NAME	VMGI-1KW-SP		VMGI-2KW-SP	VMGI-3KW-SP
RATED POWER	1000VA/1000W		2000VA/2000W	3000VA/3000W
INPUT (DC)				
Max. DC voltage	600VDC			
Nominal voltage	380VDC			
Start voltage	60V	80V	80V	
MPPT voltage range	60V ~ 560V	80V ~ 560V	80V ~ 560V	
Number of MPPT	1			
Strings per MPPT	1			
Max. input current per MPPT	13A			
Max. short-circuit current per MPPT	15.6A			
OUTPUT (AC)				
Nominal AC output power	1000W	2000W	3000W	
Max. AC apparent power	1100VA	2200VA	3300VA	
Nominal AC voltage	230V L-N			
AC grid frequency range	50Hz / 60Hz ± 5Hz			
Max. output current (A)	4.8A	9.6A	14.4A	
Power factor	0.8 leading - 0.8 lagging			
THDI	< 3%			
EFFICIENCY				
Max. efficiency	97.00%	97.50%	97.60%	
Euro efficiency	96.50%	97.00%	97.00%	
PROTECTION DEVICES				
DC switch	Yes			
Anti-islanding protection	Yes			
Output over current protection	Yes			
DC reverse polarity protection	Yes			
DC / AC surge protection	DC type II-III ; AC type II-III			
Insulation detection	Yes			
AC short circuit protection	Yes			
GENERAL SPECIFICATION				
Dimensions, W*H*D (mm)	350*290*120			
Weight (Kgs)	7.3	8	8	
ENVIRONMENT				
Operating temperature range	-25°C ~ +60°C			
Cooling type	Natural convection			
Max. operating altitude	4000 m			
Max. operating humidity	0 - 100%			
AC output terminal type	Quick connector			
IP class	IP66			
Topology	Transformer-less			
Communication interface	RS-485 / Wi-fi / 4G			
Display	LCD / Bluetooth + App			

Single Phase On-Grid Inverter



3.6KW-8KW



On-Grid Single Phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 600V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II & III DC / AC
SPD



High Efficiency: Up To
98.3%



Wi-Fi / 4G Plug
Optional



LCD With Touch Pad



MODEL NAME	VMGI-3.6KW-SP	VMGI-4KW-SP	VMGI-5KW-SP	VMGI-6KW-SP	VMGI-8KW-SP
RATED POWER	3600VA/3600W	4000VA/4000W	5000VA/5000W	6000VA/6000W	8000VA/8000W
INPUT (DC)					
Max. DC voltage	600V				
Nominal voltage	380V				
Start voltage	120V	120V	120V	120V	100V
MPPT voltage range	80V ~ 560V	80 V ~ 560V	80V ~ 560V	80V ~ 560V	80V ~ 540V
Number of MPPT	2				
Strings per MPPT	1				
Max. input current per MPPT	15A	15A	15A	15A	26A / 16A
Max. short-circuit current Per MPPT	18A	18A	18A	18A	31A/ 19A
OUTPUT (AC)					
Nominal AC output power	3600W	4000W	5000W	6000W	8000W
Max. AC apparent power	3960VA	4400VA	5500VA	6000VA	8000VA
Nominal AC voltage	230V L-N				
AC grid frequency range	50Hz / 60Hz ± 5Hz				
Max. output current	17A	19A	24A	26A	35A
Power factor	0.8 leading - 0.8 lagging				
THDI	< 3%				
EFFICIENCY					
Max. efficiency	98.1%	98.3%	98.3%	98.3%	98.3%
Euro efficiency	97.7%	97.9%	97.9%	97.9%	97.9%
PROTECTION DEVICES					
DC switch	Yes				
Anti-islanding protection	Yes				
Output over current protection	Yes				
DC reverse polarity protection	Yes				
DC / AC surge protection	DC type II-III ； AC type II III				
Insulation detection	Yes				
AC short circuit protection	Yes				
GENERAL SPECIFICATION					
Dimensions W*H*D (mm)	380*380*150				
Weight (Kgs)	10	11	11	11	13
Operating temperature range	-25°C ~ +60°C				
Cooling type	Natural convection				Fan cooling
Max. operating altitude	4000 m				
Max. operating humidity	100%				
AC output terminal type	Quick connector				
IP class	IP65				
Topology	Transformer-less				
Communication	RS-485 / Wi-fi / 4G				
Display	LCD / Bluetooth + App				

Single Phase On-Grid Inverter

VOL/MORE 10KW
Ultimate Technology Provider



Ongrid Single Phase
MPPT Inverter



IP66 Protection



Max. PV voltage: 600V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II & III DC / AC
SPD



High Efficiency: Up to
98.1%



Wi-fi / 4G Plug
Optional



LCD With Touch Pad



MODEL NAME	VMGI-10KW-SP
Max. DC power	15000W
Max. DC voltage	600Vd.c.
Normal DC voltage	360Vd.c.
Start Voltage	80Vd.c.
MPPT voltage range	60-550Vd.c.
Number of MPPT trackers	3
Strings per MPPT tracker	1
Max. input current per MPPT tracker	15Ad.c. *3
PV short circuit current	22.5Ad.c.*3
Normal AC output Power	10000W
Max. AC output Power	10000W
Max. Apparent Power	10000VA
Normal AC voltage	220/230Va.c.
Normal AC grid frequency	50/60Hz
Max. output current	45.5Aa.c.
Inrush current	< 45.5Aa.c.
Max. output fault current	102Ad.c.
Max. inverter backfeed current to the array	0Ad.c.
Max. output overcurrent protection	75Ad.c.
Output Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)
THDI	<3%
Topology	Transformer less
Max. efficiency	98.1%
Euro-eta	97.5%
Dimensions (W / L / D)	380*483*161mm
Weight(KG)	15
Operating temperature range	-25°C~+60°C
Relative humidity	0-100%
Operating Altitude	≤4000m
Noise (typical)	≤ 35dB
Cooling concept	Natural
Protection rating	IP66
Protection class	I
Overvoltage category (PV/AC)	II/III
Pollution degree	2
User Interface	LED & LCD
Communication	RS485/WIFI/GPRS

Three Phase On-Grid Inverter



3KW-12KW



On-Grid Three Phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 1100V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II DC SPD / Type III
AC SPD (Type II Optional)



High Efficiency: up to
98.6%



Wi-Fi / 4G Plug
Optional



LCD with Touch Pad



MODEL NAME	VMGI-3KW	VMGI-4KW	VMGI-5KW	VMGI-6KW	VMGI-8KW	VMGI-10KW	VMGI-12KW
RATED POWER	3000VA/3000W	4000VA/4000W	5000VA/5000W	6000VA/6000W	8000VA/8000W	10000VA/10000W	12000VA/12000W
INPUT (DC)							
Max. DC voltage	1100V						
Nominal voltage	650V						
Start voltage	250V						
MPPT voltage range	140V ~ 1000V						
Number of MPPT	2						
Strings per MPPT	1						
Max. input current per MPPT	15A						
Max. short-circuit current per MPPT	20A						
OUTPUT (AC)							
Nominal AC output power	3000W	4000W	5000W	6000W	8000W	10000W	12000W
Max. AC output power	3300VA	4400VA	5500VA	6600VA	8800VA	11000VA	13200VA
Nominal AC voltage	3/N/PE, 220V / 380V / 230V / 400V, 10% Tolerance						
AC grid frequency range	50 / 60 Hz (± 5Hz)						
Max. output current	4.8A	6.4A	8.0A	9.6A	12.8A	16.0A	19.2A
Power factor	0.8 leading - 0.8 lagging						
THDI	3%						
EFFICIENCY							
Max. efficiency	98.4%	98.4%	98.4%	98.4%	98.6%	98.6%	98.6%
Euro efficiency	97.5%	97.5%	97.5%	97.5%	98.0%	98.1%	98.1%
PROTECTION DEVICES							
DC switch	Yes						
Output over current protection	Yes						
Anti-islanding protection	Yes						
DC reverse polarity protection	Yes						
String fault detection	Yes						
DC / AC surge protection	DC type II; AC type III; type II optional						
Insulation detection	Yes						
AC short circuit protection	Yes						
GENERAL SPECIFICATION							
Dimensions, W*H*D (mm)	380*483*161						
Display	LCD						
Operating temperature range	-25°C ~ +60°C						
Cooling type	Natural cooling						
Max. operating altitude	4000 m						
Max. operating humidity	0 - 100% (non-condensing)						
AC output terminal type	Connector						
IP class	IP66						
Topology	Transformerless						
Communication	RS-485 / Wi-fi / 4G						

Three Phase On-Grid Inverter



15KW-25KW



On-Grid Three phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 1100V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II DC SPD / Type III
AC SPD (Type II Optional)



High Efficiency: Up to
98.6%



Wi-Fi / 4G Plug Optional



LCD With Touch Pad




MODEL NAME	VMGI-15KW	VMGI-20KW	VMGI-25KW
RATED POWER	15000VA/15000W	20000VA/20000W	25000VA/25000W
INPUT(DC)			
Max. DC voltage	1100V	1100V	1100V
Nominal voltage	650V	650V	650V
Start voltage	250V	250V	250V
MPPT voltage range	140V ~ 1000V	140V ~ 1000V	140V ~ 1000V
Number of MPPT tracker	2	2	2
Strings per MPPT tracker	2/1	2	2
Max. input current per MPPT	30A/15A	30A	30A
Max. short-circuit current per MPPT	40A/20A	40A	40A
OUTPUT(AC)			
Nominal AC output power	15000W	20000W	25000W
Max. AC output power	16500VA	22000VA	27500VA
Nominal AC voltage	3/N/PE, 220V / 380V / 230V / 400V, 10% Tolerance		
AC grid frequency range	50Hz / 60Hz		
Max. output current	23.9A	31.9A	39.9A
Power factor	0.8leading - 0.8lagging		
THDI	3%		
EFFICIENCY			
Max. efficiency	98.6%	98.6%	98.6%
Euro efficiency	98.2%	98.3%	98.3%
PROTECTION DEVICES			
DC switch	Yes		
Output over current	Yes		
Anti-islanding protection	Yes		
DC reverse polarity protection	Yes		
String fault detection	Yes		
AC/DC surge protection	DC: type II / AC: type III / type II optional		
Insulation detection	Yes		
AC short circuit protection	Yes		
GENERAL SPECIFICATION			
Dimensions, W*H*D (mm)	380*483*193		
Weight (Kgs)	20.7		
Operating temperature range	-25°C ~ +60°C		
Cooling type	Fan cooling		
Max. operation altitude	4000m		
Max. operation humidity	0-100% (non-condensing)		
AC output terminal type	Connector		
IP class	IP66		
Topology	Transformer-less		
Communication	RS485/Wi-fi/4G		
Display	LCD		

Three Phase On-Grid Inverter



30KW-40KW

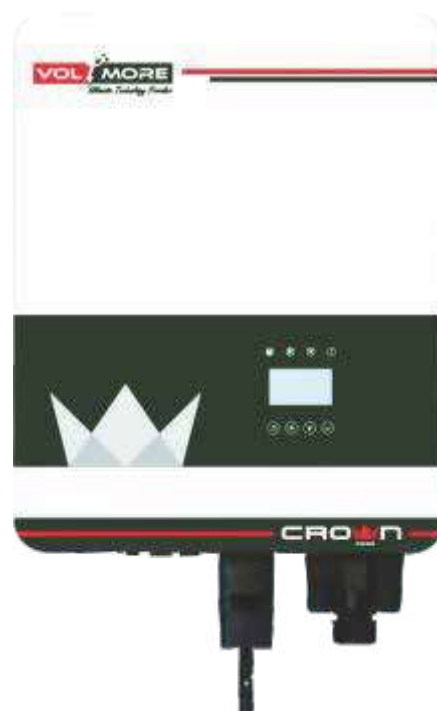

On-Grid Three phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 1100V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II DC SPD / Type III
AC SPD (Type II Optional)



High Efficiency: Up to
98.6%



Wi-fi / 4G Plug Optional



LCD With Touch Pad



MODEL NAME	VMGI-30KW		VMGI-40KW	
RATED POWER	30000VA/30000W		40000VA/40000W	
INPUT(DC)				
Recommended Max. PV array input power @ STC	39KW		52KW	
Max. DC voltage	1100V			
Nominal voltage	650V			
Start voltage	250V			
MPPT voltage range	200V ~ 1000V			
Number of MPPT tracker	3			
Strings per MPPT tracker	2			
Max. input current per MPPT	30A			
Max. short-circuit current per MPPT	40A			
OUTPUT (AC)				
Nominal AC output power	30000W		40000W	
Max. AC output power	33000VA		44000VA	
Nominal AC voltage	3/N/PE, 220V / 380V / 230V / 400V, 10% Tolerance			
AC grid frequency range	50 / 60Hz (±5Hz)			
Max. output current	47.8A		63.8A	
Power factor	0.8leading - 0.8lagging			
THDI	3%			
EFFICIENCY				
Max. efficiency	98.7%			
Euro efficiency	98.4%			
PROTECTION DEVICES				
DC switch	Yes			
Output over current	Yes			
Anti-islanding protection	Yes			
DC reverse polarity protection	Yes			
String fault detection	Optional			
DC/AC surge protection	DC: type II/AC: type III / II optional			
Insulation detection	Yes			
AC short circuit protection	Yes			
GENERAL SPECIFICATION				
Dimensions, W*H*D (mm)	380*483*223		380*483*227	
Weight (Kgs)	25.5		32.5	
Operating temperature range	- 25°C ~ +60°C			
Cooling type	Fan cooling			
Max. operation altitude	4000m			
Max. operation humidity	0-100% (non-condensing)			
AC output terminal type	Connector			
IP class	IP66			
Topology	Transformerless			
Communication	RS485/Wi-fi/4G			
Display	LCD			

Three Phase On-Grid Inverter

VOL/MORE 50KW-80KW
Ultimate Technology Provider



On-Grid Three phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 1100V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II DC SPD / Type III
AC SPD (Type II Optional)



High Efficiency: Up to
98.6%



Wi-Fi / 4G Plug Optional
Reactive Power Control



LCD With Touch Pad



MODEL NAME	VMGI-50KW	VMGI-60KW	VMGI-70KW	VMGI-80KW
RATED POWER	50000VA/50000W	60000VA/60000W	70000VA/70000W	80000VA/80000W
INPUT (DC)				
Max. DC voltage	1100V	1100V	1100V	1100V
Nominal voltage	650V	650V	650V	650V
Start voltage	250V	250V	250V	250V
MPPT voltage range	200 V~1000V	200 V~1000V	200 V~1000V	200 V~1000V
Number of MPPT	4	4	4	4
Strings per MPPT	2	2	3	3
Max. input current per MPPT	32A	32A	45A	45A
Max. short-circuit current per MPPT	48A	48A	60A	60A
OUTPUT(AC)				
Nominal AC output power	50000W	60000W	70000W	80000W
Max. AC output power	55000VA	66000VA	77000VA	88000VA
Nominal AC voltage	3/N/PE, 220V / 380V / 230V / 400V, 10% Tolerance			
AC grid frequency range	50Hz / 60Hz (±5Hz)			
Max. output current	79.7A	95.6A	111.6A	127.5A
Power factor	0.8leading - 0.8lagging			
THDI	3%			
EFFICIENCY				
Max. efficiency	98.5%	98.5%	98.6%	98.6%
Euro efficiency	98.2%	98.2%	98.3%	98.3%
PROTECTION DEVICES				
DC switch	Yes			
Output over current protection	Yes			
Anti-islanding protection	Yes			
DC reverse polarity protection	Yes			
String fault detection	Yes			
DC/AC surge protection	Type II			
Residual current monitoring	Yes			
AC short circuit protection	Yes			
GENERAL SPECIFICATION				
Dimensions, W*H*D (mm)	515*585*287			
Weight (Kgs)	51	55		
Operating temperature range	-25°C ~ +60°C			
Cooling type	Fan cooling			
Max. operating altitude	4000m			
Max. operating humidity	0-100%(no condensation)			
AC output terminal type	OT terminal			
IP class	IP66			
Topology	Transformer-less			
Communication	RS485/Wi-fi/4G			
Display	LCD			

Three Phase On-Grid Inverter

VOL+MORE 125KW
Ultimate Technology Provider



On-Grid Three phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 1100V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II DC SPD /
Type II AC SPD



High Efficiency: Up to
98.7%



Wi-Fi / 4G Plug Optional
Reactive Power Control



LCD With Touch Pad



MODEL NAME	VMGI-125KW
INPUT (DC)	
Max. DC voltage	1100V
Max. input current per MPPT	40A
Max. short-circuit current per MPPT	60A
Start voltage	350V
MPPT voltage range	200 ~ 1000V
Nominal voltage	650V
Number of MPPT	8
Strings per MPPT	2
OUTPUT (AC)	
Nominal AC output power	125KW
Max. AC apparent power	125KVA
Nominal AC voltage	3/N/PE, 220V / 380V / 230V / 400V, 10% Tolerance
AC grid frequency range	50Hz / 60Hz (±5Hz)
Max. output current	181.2A
Power factor	0.8 leading - 0.8 lagging
THDI	< 3% (nominal power)
EFFICIENCY	
Max. efficiency	98.7%
Euro efficiency	98.5%
PROTECTION DEVICES	
DC switch	Yes
Anti-islanding protection	Yes
Output over current protection	Yes
DC reverse polarity protection	Yes
String fault detection	Optional
DC/AC surge protection	DC type II; AC type II
AC short circuit protection	Yes
AFCI function	Optional
Night SVG function	Optional
PID recovery	Optional
Insulation detection	Yes
Residual current monitoring	Yes
GENERAL SPECIFICATION	
Dimensions, W*H*D (mm)	965*700*355
Weight (Kgs)	85
Operating temperature range	-30 ~ 60°C
Cooling type	Fan Cooling
Max. operation altitude	5,000 m (> 4,000m derating)
Max. operating humidity	0-100%
Ipclass	IP66
Noise (dB)	75dB
Topology	Transformer-less
Communication	RS485/PLC/Wi-fi/4G
Display	LED , Bluetooth + APP

Three Phase On-Grid Inverter

VOL MORE 350KW
Ultimate Technology Provider



On-Grid Three phase
MPPT Inverter



IP66 Protection



Max. PV Voltage: 1100V



AC Grid Frequency:
50Hz / 60Hz



DC Switch, Anti-Islanding
& Over Current Protection



Type II DC / AC SPD
Smart I - V Curve



High Efficiency: Up to
99%



Wi-Fi / 4G Plug Optional



LCD With Touch Pad



**10
YEARS
WARRANTY**

Terms & Conditions Apply

MODEL NAME	VMGI-350KW-1	VMG-350KW-2
INPUT (DC)		
Max. DC voltage	1500V	
Max. input current per MPPT	30A	40A
Max. short-circuit current per MPPT	45A	60A
Start voltage	500V	
MPPT voltage range	500V ~ 1500V	
Number of strings	32	24
Number of MPPT	16	12
Strings per MPPT	2	
OUTPUT (AC)		
Nominal AC output power	350KW	
Max. AC apparent power	352KVA	
Nominal AC voltage	3/N/PE, 220V / 380V / 230V / 400V, 10% Tolerance	
Nominal frequency	50Hz / 60Hz (±5Hz)	
Frequency range	45-55Hz / 55-65Hz	
Max. output current	254A	
Power factor	0.8Leading - 0.8lagging	
THDI	< 3% (nominal power)	
EFFICIENCY		
Max. efficiency	99%	
PROTECTION DEVICES		
DC switch	Yes	
Anti-islanding protection	Yes	
Over current protection	Yes	
DC reverse polarity protection	Yes	
String fault detection	Yes	
DC/AC surge protection	Type II	
AC short circuit protection	Yes	
Residual current detection	Yes	
PID recovery	Optional	
Night SVG function	Optional	
GENERAL SPECIFICATION		
Dimensions, W*H*D (mm)	1050*860*393	
Weight (Kgs)	130	
Operating temperature range	-30 ~ 60°C	
Cooling type	Fan cooling	
Max. operation altitude	5,000 m (> 4,000m derating)	
Max. operating humidity	0 -100%	
AC output terminal type	OT terminal	
IP class	IP66	
Noise (dB)	75dB	
Topology	Transformer-less	
Communication	RS485 / PLC	
Display	LED , Buletooth + APP	

Solar Water Pump Controller



CM-SPC50 2.2-37KW



Water Pump Protection



Web/App Monitoring,
Touch Screen



Stable Operation Under
Weak Light



220–900 VDC MPPT
Input Range



AC & DC Power Support



Auto-Switches Between
Solar and Grid Power




Precise Speed & Torque,
High Efficiency



CM-SPC50 2.2-37KW

MODEL NAME	Rated Power (kW)	Power Supply Capacity (kVA)	Input Current (A)	Output Current (A)	Adapted Motor	
					kW	HP
150-450VDC / Single phase 200-240VAC input Three phase 0-220VAC output						
CM-SPC50-2.2KWSP	2.2	4	23	9.6	2.2	3
220-900VDC / Three phase 380-480VAC input Three phase 0-380VAC output						
CM-SPC50-2.2KW	2.2	4	5.8	5.1	2.2	3
CM-SPC50-4KW	4	5.9	10.5	9	4	5.5
CM-SPC50-5.5KW	5.5	8.9	14.6	13	5.5	7.5
CM-SPC50-7.5KW	7.5	11	20.5	17	7.5	10
CM-SPC50-11KW	11	17	26	25	11	15
CM-SPC50-15KW	15	21	35	32	15	20
CM-SPC50-18.5KW	18.5	24	38.5	37	18.5	25
CM-SPC50-22KW	22	30	46.5	45	22	30
CM-SPC50-30KW	30	40	62	60	30	40
CM-SPC50-37KW	37	57	76	75	37	50

Solar Water Pump Controller

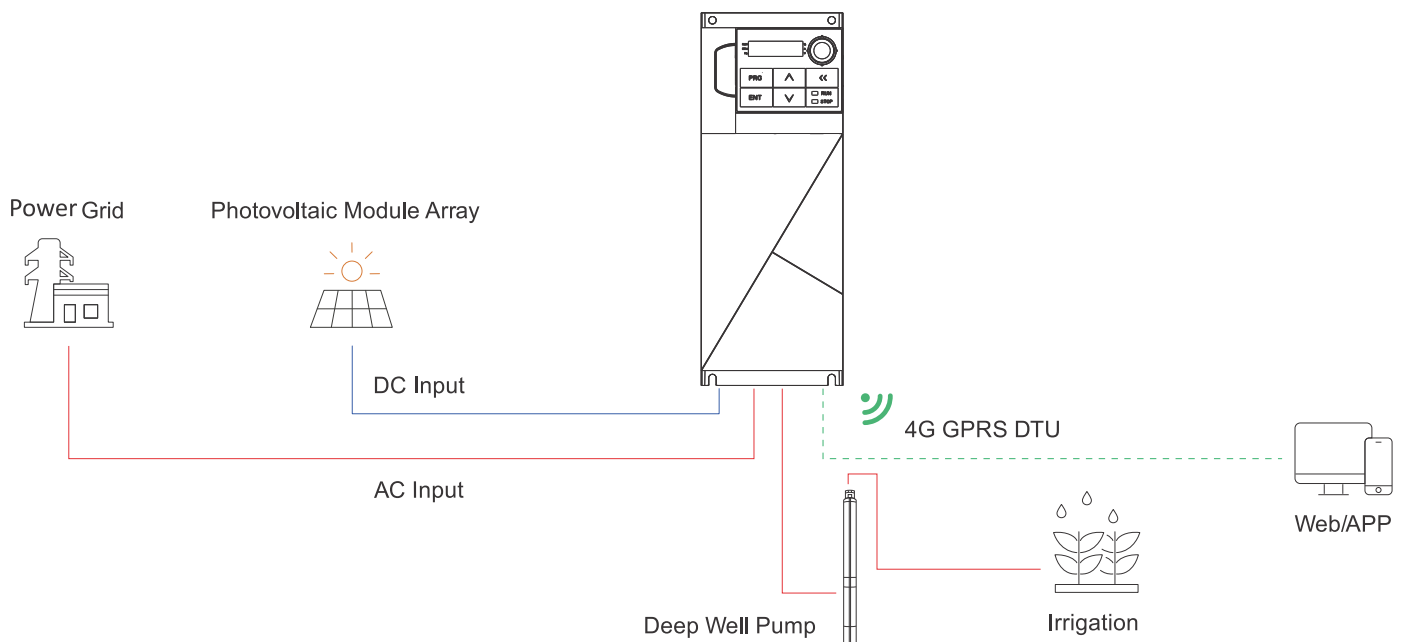

— DC — AC — Communication line

Solar Water Pump Controller



CM-SPC33 45-110KW



Up to 99.8% MPPT
Efficiency



Multi Pump Protection



AM PMSM Single Phase,
Multi Types of Pumps



Automatic Hybrid
Compensation



Automatic Start & Stop



Zero Programming



CM-SPC33

45-110KW

MODEL NAME	CM-SPC 33-45KW	CM-SPC 33-55KW	CM-SPC 33-75KW	CM-SPC 33-93KW	CM-SPC 33-110KW
DC Input					
Max. Input Voltage [V]	900				
Start Voltage [V]	350				
Min. Input Voltage [V]	220				
MPPT Voltage Range [V]	500~750				
Recommended Input Working Voltage [V]	560				
Recommended PV Array Power [kW]	54~72	66~88	90~120	112~149	132~176
AC Input					
Input Voltage [V]	3PH 380-480				
Input Frequency [Hz]	50/60				
AC Output					
Output Power [kW]	45	55	75	93	110
Rated Current [A]	91	112	150	176	210
Output Voltage [V]	3PH 0-380/480				
Output Frequency [Hz]	0-50/60				
Control Performance					
Control Mode	V/F , SVC				
Overload Capability	150% of rated current:60 seconds;180% of rated current:1 seconds				
Protection					
Undervoltage Protection	Integrated				
Overvoltage Protection	Integrated				
Overload Protection	Integrated				
Short-circuit Protection	Integrated				
Overheat Protection	Integrated				
Lack of Water Protection	Integrated				
Surge Protection	Integrated				
General Data					
MPPT Efficiency	99.8%				
Ingress Protection Degree	IP20				
Cooling Mode	Air cooling				
Communication Interface	RS485 communication interface				
Ambient Operating Temperature	-20℃ ~ 60℃ (>45℃, rated power will be derated for 1% by every additional 1℃)				
Operation Altitude	Below 2000 meters, there is no need to derate, 2000-3000 meters, each increase of 100 meters, derate 1%				
Physical Dimension [H*W*D] [mm]	543*310*280			580*358*328	
Weight [kg]	22.3	22.7	38.93	39.45	40.07
Standard Warranty [Month]	18				

Notes: Inductor is suggested to be added to the solar pumping system if the distance between solar pump controller and water pump is over 50m

Solar Water Pump Controller



CM-SPC33

132-200KW



Up to 99.8% MPPT
Efficiency



Multi Pump Protection



AM PMSM Single Phase,
Multi Types of Pumps



Automatic Hybrid
Compensation



Automatic Start & Stop



Zero Programming



CM-SPC33

132-200KW

MODEL NAME	CM-SPC 33-132KW	CM-SPC 33-160KW	CM-SPC 33-200KW
DC Input			
Max. Input Voltage [V]	900		
Start Voltage [V]	350		
Min. Input Voltage [V]	220		
MPPT Voltage Range [V]	500~750		
Recommended Input Working Voltage [V]	560		
Recommended PV Array Power [kW]	158~211	192~256	240~320
AC Input			
Input Voltage [V]	3PH 380-480		
Input Frequency [Hz]	50/60		
AC Output			
Output Power [kW]	132	160	200
Rated Current [A]	253	304	377
Output Voltage [V]	3PH 0-380/480		
Output Frequency [Hz]	0-50/60		
Control Performance			
Control Mode	V/F, SVC		
Overload Capability	150% of rated current:60 seconds;180% of rated current:1 seconds		
Protection			
Undervoltage Protection	Integrated		
Overvoltage Protection	Integrated		
Overload Protection	Integrated		
Short-circuit Protection	Integrated		
Overheat Protection	Integrated		
Lack of Water Protection	Integrated		
Surge Protection	Integrated		
General Data			
MPPT Efficiency	99.8%		
Ingress Protection Degree	IP20		
Cooling Mode	Air cooling		
Communication Interface	RS485 communication interface		
Ambient Operating Temperature	-20°C ~ 60°C(>45°C, rated power will be derated for 1% by every additional 1°C)		
Operation Altitude	Below 2000 meters, there is no need to derate, 2000-3000 meters, each increase of 100 meters, derate 1%		
Physical Dimension [H*W*D] [mm]	1199*502*355	1570*600*408	1696*800*246.3
Weight [kg]	87.68	88.42	179.8
Standard Warranty [Month]	18		

Note: Inductor is suggested to be added to the solar pumping system if the distance between solar pump controller and water pump is over 50m.

All-In-One ESS



Feed-in to the Grid



ESS 6.5KW Inverter & 5kWh
LiFePO4 Battery



Dual MPPT with 17A Each with Max.
PV Input Power 9600W



ON / OFF Grid Switching



Expandable Up to 15kWh



Dual Output for Smart Load
Management



PV or AC or Generator
Wake Up Battery



User-friendly Touch Screen



Parallel Operation Up to 16 Units



6.5KW/5KWH



<15-min Quick Install
<10ms Off-Grid Switch
<DC/AC Ratio up to 1.6
<5kWh/10kWh Optional



MODEL NAME		NURA 6.5KW
INPUT (PV DC)		
Max. PV input power (W)		9600 (4800/4800)
Rated PV input voltage (V)		320
Number of independent MPPT inputs		2 / (1:1)
PV input voltage range (V)		100 ~ 500
MPPT voltage range (V)		120 ~ 400
Start-up voltage (V)		100
Max. PV input current per MPPT (A)		17 / 17
Max. PV short-circuit current input per MPPT (A)		25 / 25
Max. PV charging current (A)		140
Battery Input		
Battery voltage (V)		38.4 ~ 60
Max. charging /discharging current (A)		140
Max. charging /discharging power (W)		6500
UPS output @ off-grid		
Output voltage waveform		Pure sine wave
Output voltage regulation (V)		208 / 220 / 230 / 240±5%
Output frequency (Hz)		50 / 60
Rated output power (W)		6500
Rated output current (A)		28.3
Peak efficiency		93%
Overload protection		5s@≥150% overload; 10s@110%~150% overload
Surge power		2*Pn, 5s
Parallel quantity		16pcs
AC Input		
Nominal input voltage (V)		230
Nominal input frequency (Hz)		50 / 60 (Auto detection)
Max. AC input current (A)		39.5
Max. AC input power (W)		9000
Max. AC charging current (A)		140
AC Output @ Grid		
Rated AC output current (A)		28.3
Rated AC output power (W)		6500
Rated AC current of bypass relays (A)		60
Switching time		Typical<7ms@Single; <20ms@Parallel
Gen		
Rated GEN voltage (V)		220 / 230 / 240
Rated GEN frequency (Hz)		50 / 60
Rated GEN input Current (A)		32
Rated GEN input Power (W)		7370
Rated GEN current of bypass relays (A)		60
Battery MODULE		
Battery power (kwh)		5.12
Rated voltage (V)		51.2
Rated capacity (Ah)		100
Battery type		Lithium-ion
Max. parallel (Default)		2PCS
Max. discharging current (A)		100
Max. charging current (A)		100
Dimension, W*H*D (mm)		580*434*165
Net weight (kgs)		54
Standard		
Protection / General Specifications		
Grid monitoring		YES
AC surge protection		Type III
Dimension, W*H*D (mm)		580*1300*165mm
Weight (kgs)		125.4
Ingress protection rating		IP21
Display & communication interface		Touch screen, RS485 / Wi-fi / CAN
Cooling method		Smart cooling
Topology		Transformer-less
Noise emission (typical) (dB)		<58
Operating temperature range (°C)		0 ~ 45
Storage temperature (°C)		-15 ~ 60
Humidity		5% to 95% Relative Humidity (Non-condensing)
Altitude (m)		<2000

Transparent LiFePO4 Battery



CMLB-12.8V-100 CMLB-25.6V-100
CMLB-12.8V-200 CMLB-25.6V-200



Eco-friendly Transparent ABS Casing



Grade A Prismatic LiFePO4 Cells



10 Years Designed Service Life




4000 Cycles @ 80% DoD, 0.5C @ 25°C




IP65 Protection


Discharge Performance at 25°C

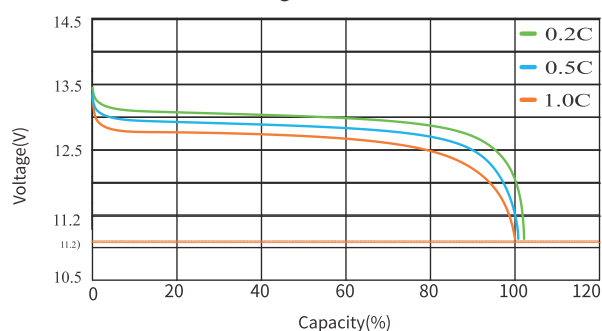


Charge and Discharge at 25°C, 0.5C

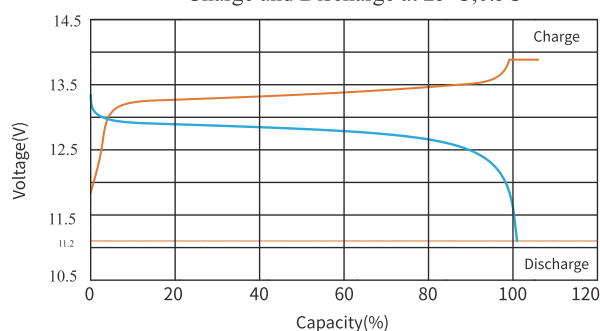

Temperature Effects on Capacity at 0.5C

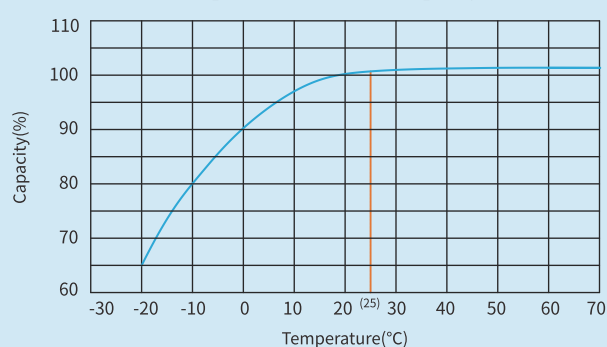

Cycle Life with DOD @ 0.5°C, 25°C

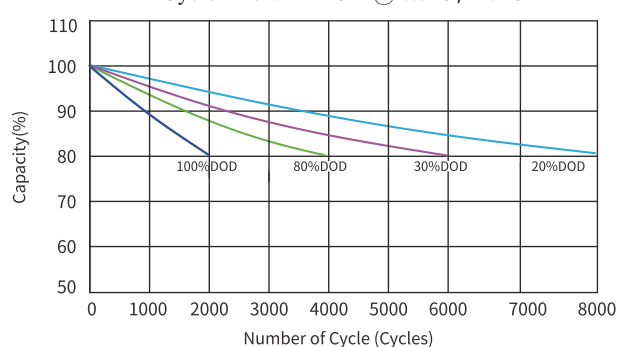

CMLB-12.8V-100 CMLB-25.6V-100

CMLB-12.8V-200 CMLB-25.6V-200

MODEL NAME	CMLB-12.8V-100	CMLB-12.8V-200	CMLB-25.6V-100	CMLB-25.6V-200
Basic Performance				
Nominal Voltage (VDC)	12.8	12.8	25.6	25.6
Nominal Capacity (Ah)	100	200	100	200
Energy (kWh)	1.28	2.56	2.56	5.12
Internal Resistance (mΩ)	<=15	<=10	<=15	<=10
System Series/Parallel	4S, 4P	4S, 4P	2S, 4P	2S, 4P
Self Discharge	<=2%/Month			
Cycle Life	>6000 times @ 95% DOD			
Design Life	10 Years			
Charge Performance				
Recommended Charge Current (A)	50	100	50	200
Maximum Charge Current (A)	100	200	100	200
Recommended Charge Voltage (V)	13.6~13.8	13.6~13.8	13.6~13.8	13.6~13.8
Max Charge Voltage (V)	14.4	14.4	14.4	14.4
Overcharge Protection Voltage (V)	14.8~15.0	14.8~15.0	14.8~15.0	14.8~15.0
Charge Cut-off Voltage	>14.8V (0.5~1.5s)	>14.8V (0.5~1.5s)	>14.8V (0.5~1.5s)	>14.8V (0.5~1.5s)
Charge Mode	CC/CV			
Discharge Performance				
Maximum Continuous Discharge Current (A)	100	200	100	200
Pulse Current (<=5s)	600	600	600	750
Rated Discharge Cut-off Voltage (V)	11.2	11.2	22.4	20.8
Minimum Discharge Cut-off Voltage (V)	>10	>10	>20	>20
Reconnect Voltage (V)	>10.4	>10.4	>20.8	>20.8
Short Circuit Protection (μs)	200~800			
Mechanical Specifications				
Weight (kg)	10.1	19.5	21	37
Size (mm)	306*169*215	520*240*220	520*240*220	520*268*220
Case Material	ABS			
Terminal Type	M8			
IP Rating	IP65			
Temperature Performance				
Discharge Temperature (°C)	-20~60			
Charge Temperature (°C)	0~45			
Storage Temperature (°C)	-5~35			
High Temperature Cut-off (°C)	65			
Reconnect Temperature (°C)	48			



Supports Series Connection

WALL-MOUNTED LiFePO4 BATTERY



CMLB-25.6-200-WM
CMLB-51.2-100-WM



GRADE A LiFePO4 Cells, > 8000
Cycles @ 50% DoD, 0.5C @ 25°C



Parallel Up to 16 Modules



Supports CAN/RS485, compatible
with major inverter brands



WiFi & Bluetooth for real time
monitoring



Fire-redundant wiring and laser
welding for enhanced safety



Built-in Smart BMS with multi-pro-
tection (OVP, ODP, OTP, SCP)



CMLB-25.6-200-WM

CMLB-51.2-100-WM

MODEL NAME	CMLB-25.6-200-WM	CMLB-51.2-100-WM
GENERAL SPEC		
Rated Voltage (V)	25.6	51.2
Rated Capacity (Ah)	200	100
Rated Energy (Wh)	5120	5120
OPERATION PARAMETER		
Voltage Range (V)	22.4-28.8	44.8-56.0
Charge Voltage Range (V	28.0-28.8	55.2-56.0
Cut-off Voltage (V)	22.4	44.8
Recommend Charge Current (A)	100	50
Max Charge Current (A)	200	100
Max Discharge Current (A)	200	100
PHYSICAL PARAMETER		
Dimension: L*W*H (mm)	455*575*230	550*400*178
Weight (kg)	44.5	44.5
Communication Port	RS485、 CAN	
Display	LED+LCD	
Terminal	OT terminal	
ENVIRONMENT PARAMETER		
Humidity (%)	5-95% RH	
Charge Temperature Range (°C)	0-45	
Discharge Temperature Range (°C)	-20-60	
Storage Temperature Range (°C)	-20-45	
SERVICE LIFE		
Cycle Life	> 8000 (0.5C @ 25℃ , 50% DOD)	
Design Life (Year)	15	

MOBILE LiFePO4 BATTERY



CMLB-51.2-230

CMLB-51.2-280



GRADE A LiFePO4 Cells, > 8000 Cycles @ 50% DoD, 0.5C @ 25°C



Parallel Up to 16 Modules



Supports CAN/RS485, Compatible with Major Inverter Brands



WiFi & Bluetooth for Real Time Monitoring



Fire-redundant Wiring and Laser Welding for Enhanced Safety




Built-in Smart BMS with Multi-Protection (OVP, ODP, OTP, SCP)



MODEL NAME	CMLB-51.2-230	CMLB-51.2-280
GENERAL SPEC		
Rated Voltage (V)	51.2	
Rated Capacity (Ah)	230	280
Rated Energy (Wh)	11776	14336
OPERATION PARAMETER		
Voltage Range (V)	44.8-56.0	
Charge Voltage Range (V)	55.2-56.0	
Cut-off Voltage (V)	44.8	
Recommend Charge Current (A)	100	
Max Charge Current (A)	200	
Max Discharge Current (A)	200	
PHYSICAL PARAMETER		
Dimension : L*W*H (mm)	455*750*230	460*900*231
Weight (kg)	93.8	124.5
Communication Port	RS485 、 CAN	
Display	LED+LCD	
Terminal	OT terminal	
ENVIRONMENT PARAMETER		
Humidity (%)	5-95% RH	
Charge Temperature Range (°C)	0-45	
Discharge Temperature Range (°C)	-20-60	
Storage Temperature Range (°C)	-20-45	
SERVICE LIFE		
Cycle Life	>8000 (0.5C @ 25℃, 50% DOD)	
Design Life (Year)	15	

HIGH VOLTAGE LiFePO4 BATTERY

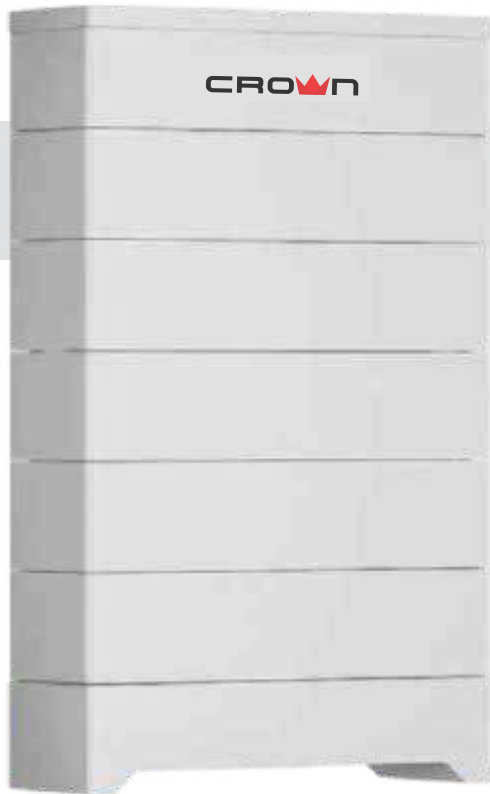

CMLB-5.1HV



20 Stack Parallel



9 Series Per Stack



Ultra Safe LFP Material



High Voltage Battery



Short Circuit Protection



Flexible Remote Upgrade



MODEL NAME	CMLB-5.1HV
Scalable Connection	2 ~ 9pcs series per stack, up to 20 stack parallel
Battery module nominal voltage	70.4V
Battery module nominal capacity	72Ah
Battery module nominal energy	5.069kWh
Protection	IP65
Battery module voltage range	61.6V~80.3V
Recommend charge/discharge current	36A, 0.5C per battery module
Max continuous charge/discharge current	50.4A, 0.7C per battery module
Max continuous charge/discharge power	3.548 kW per battery module
Series per stack	Max. 9 battery series, up to 45kWh per stack
System expansion	10 stack parallel w/o extra device needed, 20 stack parallel with extra BAU installed
DOD	95%
Charging/Discharging temperature	0 ~ +55 °C, -20 ~ +55 °C
Recommend storage humidity	10% ~ 90% RH
Warranty *	10 years, 6000 cycles; whichever occurs first
Remote Maintenance	Flexible remote upgrade, Original firmware backup to prevent upgrade failure

*@25°C , 95% DOD, 0.5C testing condition

CROWN



Note:

The technical data mentioned may be updated or revised due to product development.

The data in this brochure is subject to change without notice.

The latest datasheet and catalogue can be acquired via info@crownmicroglobal.com

Crown Micro FZCO

Address: Plot No. S60806, Jebel Ali Free Zone South, Dubai, United Arab Emirates

Tel: +971 4 8839373 | Fax: +971 4 2561144



Crown Micro Global



www.crownmicroglobal.com